

Exclusive Partner For INDIA

HIGH QUALITY 6 ROLLER POUCH LAMINATOR

TOFO 330R6/480R6

MADE IN KOREA



6 Roller Heat System


4 heated rollers + 2 cold rollers allow for a professional crystal-clear and bubble-free finish.

Removable Cover

Allows quick access to the rollers with easy to remove thumb screws.

Air Cooling System

Patented internal cooling system ensures the laminator stays cool to the touch while in use.

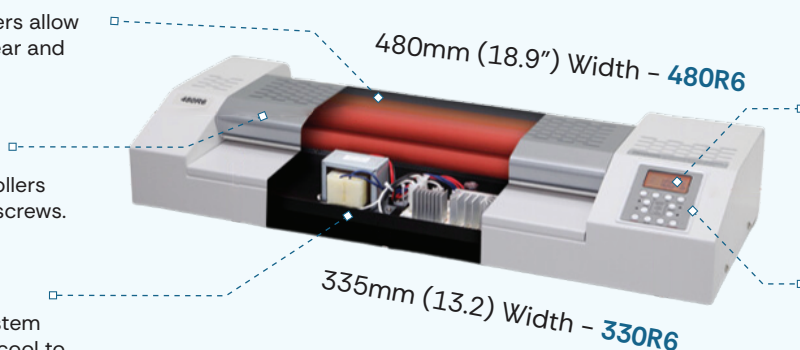

Programmable Memory Settings

Memorize the ideal temperature & speed settings for your most frequently used pouches.

LCD Control Panel

Backlit LCD display with labeled keypad make it easy to operate.

Specification

TOFO 330R6

TOFO 480R6

Maximum Width	:	335mm (13.2")	480mm (18.9")
Maximum Speed	:	1,350mm/min.	1,160mm/min.
Maximum Laminating Film	:	350mic. (14mil.)	
Thickness of Mount	:	3mm	
Heating System	:	Heating Roller Internal Heater	
Operation Temperature	:	0~140°C	
Quantity of Roller	:	4 Heating Rollers + 2 Cold Rollers	
Display	:	LCD	
Temperature Controller	:	Yes	
Speed Controller	:	Yes	
Reverse Switch	:	Yes	
Preheating Time	:	5 min.	6 min.
Power Consumption	:	1,050watts	
Dimension	:	535 x 270 x 140mm	692 x 270 x 140mm
Box Dimension	:	585 x 320 x 175mm	735 x 320 x 175mm
Weight	:	16.1kgs(N)/17.6kgs(G)	20kgs(N)/21.9kgs(G)
Pallet Packing	:	28 units/pallet	24 units/pallet

TOFO SPEED R8 / R10

MADE IN KOREA

- Heating roller internal heater
- Full digital & LCD display
- "Patent" air cooling system
- Hot & cold laminating
- Auto power-off system
- Auto electricity safety system
- Programmable memory key
- Installed heat treatment motor gear
- High speed working (max.4,000mm/min.)-TOFO SpeedR10
- Auto ejector-TOFO SpeedR10
- Powerful DC motor-TOFO SpeedR10



Specification	TOFO R8	TOFO R10
Maximum Width	: 335mm (13.2")	330mm (13")
Maximum Speed	: 2,100mm/min.	4,000mm/min.
Maximum Laminating Film	: 350mic. (14mil.)	
Thickness of Mount	: 3mm	
Heating System	: Heating Roller Internal Heater	
Operation Temperature	: 0~150°C	0~160°C
Quantity of Roller	: 4 Heating Rollers + 2 Cold Rollers + 2 Ejector Rollers	6 Heating Rollers + 2 Cold Rollers + 2 Ejector Rollers
Display	: LCD	
Temperature Controller	: Yes	
Speed Controller	: Yes	
Reverse Switch	: Yes	
Preheating Time	: 6 min.	8 min.
Power Consumption	: 1,250watts	1,300watts
Dimension	: 535 x 270 x 140mm	655 x 355 x 140mm
Box Dimension	: 585 x 320 x 175mm	727 x 420 x 210mm
Weight	: 17.5.kgs(N) / 19 kgs(G)	27.4kgs(N)/29.4kgs(G)
Pallet Packing	: 28 units/pallet	24 units/pallet

+91 93243 76523 | +91 93243 63933 | +91 80978 08799

sales@ashwinenterprises.org | www.ashwinenterprises.org

Unit no.: 35/G, Apollo Industrial Estate, Behind Holy Family School, Off. Mahakali Caves Road, Andheri East, Mumbai-400093.

REGIONAL OFFICE : DELHI | BANGLORE | HYDERABAD | TAMILNADU | COCHIN